

Shelf & Furniture lighting

SMINI TRACK

System




www.boehm-tec.de


Specifications

Order no.	Model	Power (W)	Ra(R9) (typ.)	CCT (K)	Beam angle	Luminous flux(lm)	Luminaire efficacy(lm/w)	Length (mm)	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1030-111135-0132	MINITRACK EYES-L1-24	1.5	97(90)	3000	20°	80	53	50	160	3.5	425x220x240
1030-111035-0133	(Black)		97(90)	4000		88	59				
1030-111135-0133	MINITRACK EYES-L1-24	1.5	97(90)	3000	20°	80	53	50	160	3.5	425x220x240
1030-111035-0134	(Silver)		97(90)	4000		88	59				
1030-102109-0133	MINITRACK EYES-L2-24	2.6	97(90)	3000	20°	160	62	100	144	5.1	400x275x185
1030-102009-0132	(Black)		97(90)	4000		180	69				
1030-102109-0134	MINITRACK EYES-L2-24	2.6	97(90)	3000	20°	160	62	100	144	5.1	400x275x185
1030-102009-0133	(Silver)		97(90)	4000		180	69				
1030-103130-0133	MINITRACK EYES-L3-24	3.7	97(90)	3000	20°	240	65	150	48	2.8	320x200x210
1030-103030-0132	(Black)		97(90)	4000		260	70				
1030-103130-0134	MINITRACK EYES-L3-24	3.7	97(90)	3000	20°	240	65	150	48	2.8	320x200x210
1030-103030-0133	(Silver)		97(90)	4000		260	70				
1030-107010-0134	MINITRACK LINEAR-L7-24V	0.75	93(50)	3000	125°	62	83	30	160	2	200x200x140
1030-107010-0135			93(50)	4000		67	89				
1030-128116-0130	MINITRACK LINEAR-L28-24V	2.4	93(50)	3000	125°	210	88	150	400	4.5	390x325x210
1030-128016-0130			93(50)	4000		230	96				
1030-156108-0130	MINITRACK LINEAR-L56-24V	4.8	93(50)	3000	125°	420	88	300	200	4.5	390x325x210
1030-156008-0130			93(50)	4000		450	94				
1030-700110-0130	MINITRACK LINEAR-L112-24V	9.6	93(50)	3000	125°	830	86	600	200	7.5	665x390x210
1030-700010-0130			93(50)	4000		900	94				
1030-700111-0130	MINITRACK LINEAR-L168-24V	14.4	93(50)	3000	125°	1200	83	900	200	13.9	970x390x210
1030-700011-0130			93(50)	4000		1400	97				
1030-700112-0130	MINITRACK LINEAR-L196-24V	16.8	93(50)	3000	125°	1500	89	1049	200	15.7	1105x390x210
1030-700012-0130			93(50)	4000		1600	95				


Photometrics



MINITRACK EYES(20°)
Strahler



MINITRACK SPOTS(30°)



MINITRACK LINEAR(125°)

Shelf & Furniture lighting

SMINI TRACK SYSTEM



www.boehm-tec.de

Accessories (optional)

Order No.	Photo	Description	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1099-013923-0133		MINITRACK-022 Magnatic metal clip	600	4.8	235x225x155
1099-000057-0130		MINITRACK-025 40° Mounting clips	360	2.6	240x190x90
1099-013923-0132		MINITRACK-023 Showcase holder silver	200	4.6	365x240x175
1099-013923-0138		MINITRACK-023 Showcase holder black	200	4.6	365x240x175
1099-000084-0130		MINITRACK-041 End cap silver 1pc	200	0.6	365x240x175
1099-000084-0131		MINITRACK-041 End cap black 1pc	200	0.6	365x240x175
1063-400065-0131		MINITRACK-0306HL Hard connector silver	600	1.5	270x225x220
1063-400065-0130		MINITRACK-0306HL Hard connector black	600	1.5	270x225x220
1001-260021-0133		Model: 4VL-E Matching driver, max. 75W. Input: 220-240VAC 2000mm cable +plug Output: 24V 400mm cable +2*DSG plug	30	15	425x265x350



Model	Max. linkable (W)	Model	Max. linkable (W)
MINITRACK EYES-L1-24V	-	MINITRACK SPOTS-L2-24V	48
MINITRACK EYES-L2-24V	-	MINITRACK SPOTS-L4-24V	48
MINITRACK EYES-L3-24V	-		
MINITRACK LINEAR-L7-24V	-		
MINITRACK LINEAR-L28-24V	48		
MINITRACK LINEAR-L56-24V	48		
MINITRACK LINEAR-L112-24V	48		
MINITRACK LINEAR-L168-24V	48		

Showcase lighting SMINI TRACK System



www.boehm-tec.de




- Housing: Extrusion aluminum/Machining aluminum oxidized.
- Lens: Injection plastic.
- Cover: Extrusion plastic
- LED parts: High efficacy LED, non-replaceable.
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- Input Voltage: 24V.
- Ta: -20~35°C.
- Lifetime: 50,000 hrs (L80, B20, Ta = 25°C, 12 hrs/day).
- Degree of protection: IP20.
- Impact resistance: IK02.
- N.W. :15/30/12.5/15/30/7.5/10.7/26/38/60 g.




Dimensions: (mm)


MINITRACK EYES-L1-24V




MINITRACK EYES-L2-24V




MINITRACK EYES-L3-24V

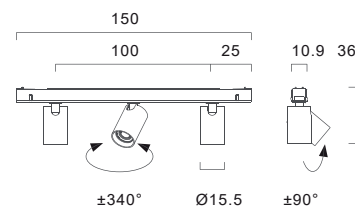

MINITRACK SPOTS-L2-24V



MINITRACK SPOTS-L4-24V



MINITRACK LINEAR





Model	Length(mm)
MINITRACK LINEAR-L7-24V	30
MINITRACK LINEAR-L28-24V	150
MINITRACK LINEAR-L56-24V	300
MINITRACK LINEAR-L112-24V	600
MINITRACK LINEAR-L168-24V	900
MINITRACK LINEAR-L196-24V	1049

Specifications

Order no.	Model	Power (W)	Ra(R9) (typ.)	CCT (K)	Beam angle	Luminous flux(lm)	Luminaire efficacy(lm/w)	Length (mm)	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1030-102108-0131	MINITRACK SPOTS-L2-24V	2.5	97(90)	3000	30°	150	60	150	400	7.5	390x325x210
1030-102008-0131	(Black)		97(90)	4000		170	68		400	7.5	390x325x210
1030-102108-0130	MINITRACK SPOTS-L2-24V	2.5	97(90)	3000	30°	150	60	150	400	7.5	390x325x210
1030-102008-0130	(Silver)		97(90)	4000		170	68		400	7.5	390x325x210
1030-104119-0131	MINITRACK SPOTS-L4-24V	4.8	97(90)	3000	30°	340	71	300	200	7.5	390x325x210
1030-104019-0131	(Black)		97(90)	4000		370	77		200	7.5	390x325x210
1030-104119-0130	MINITRACK SPOTS-L4-24V	4.8	97(90)	3000	30°	340	71	300	200	7.5	390x325x210
1030-104019-0130	(Silver)		97(90)	4000		370	77		200	7.5	390x325x210

Showcase lighting
SMINI TRACK
System
Accessories (optional)

Order No.	Photo	Description	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1063-000003-0130		MINITRACK-001 Track silver 1100mm	50	8.2	1175x145x110
1063-000003-0131		MINITRACK-001 Track black 1100mm	50	8.2	1175x145x110
1030-107007-0130		MINITRACK-031 Right angle with light 4000k	160	2	200x200x140
1063-400031-0130		MINITRACK-032 Right angle connector silver	160	2	200x200x140
1063-400031-0131		MINITRACK-032 Right angle connector black	160	2	200x200x140
1063-400032-0130		MINITRACK-033 Rotatable connector silver	112	2	200x200x140
1063-400032-0131		MINITRACK-033 Rotatable connector black	112	2	200x200x140
1099-013923-0131		MINITRACK-034 Blind cover silver 100mm	600	2	270x225x220
1099-013923-0137		MINITRACK-034 Blind cover black 100mm	600	2	270x225x220
1030-128026-0131		MINITRACK-035 150mm 3000K	320	6.5	390X325X210
1030-128026-0130		MINITRACK-035 150mm 4000K	320	6.5	390X325X210
1099-013923-0130		MINITRACK-011 2500mm Input cable white	270	12	505x300x250
1099-013923-0139		MINITRACK-011 2500mm Input cable black	150	8	505x300x250
1030-114014-0130		MINITRACK-012 150mm 3000K 100°2 X Input cable 2500mm	50	7.5	385x300x275
1030-114014-0131		MINITRACK-012 150mm 4000K 100°2 X Input cable 2500mm	50	7.5	385x300x275
1099-013923-1130		MINITRACK-021 Mounting clip	600	4.8	235x225x155

Showcase lighting SMINI TRACK System

Accessories (optional)



www.boehm-tec.de

Order No.	Photo	Description	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1099-013923-0133		MINITRACK-022 Magnatic metal clip	600	4.8	235x225x155
1099-000057-0130		MINITRACK-025 40° Mounting clips	360	2.6	240x190x90
1099-013923-0132		MINITRACK-023 Showcase holder silver	200	4.6	365x240x175
1099-013923-0138		MINITRACK-023 Showcase holder black	200	4.6	365x240x175
1099-000084-0130		MINITRACK-041 End cap silver 1pc	200	0.6	365x240x175
1099-000084-0131		MINITRACK-041 End cap black 1pc	200	0.6	365x240x175
1063-400065-0131		MINITRACK-0306HL Hard connector silver	600	1.5	270x225x220
1063-400065-0130		MINITRACK-0306HL Hard connector black	600	1.5	270x225x220
1001-260021-0133		Model: 24VL-E Matching driver, max. 75W. Input: 220-240VAC 2000mm cable +plug Output: 24V 400mm cable +2*DSG plug	30	15	425x265x350



Model	Max. linkable (W)	Model	Max. linkable (W)
MINITRACK EYES-L1-24V	-	MINITRACK SPOTS-L2-24V	48
MINITRACK EYES-L2-24V	-	MINITRACK SPOTS-L4-24V	48
MINITRACK EYES-L3-24V	-		
MINITRACK LINEAR-L7-24V	-		
MINITRACK LINEAR-L28-24V	48		
MINITRACK LINEAR-L56-24V	48		
MINITRACK LINEAR-L112-24V	48		
MINITRACK LINEAR-L168-24V	48		